


Universal GAVR

Universal GAVR-8A /15A – Suitable for replacing all kinds of AVR used on the generating Set from 30 kva and above.

GAVR – 8A / 15A

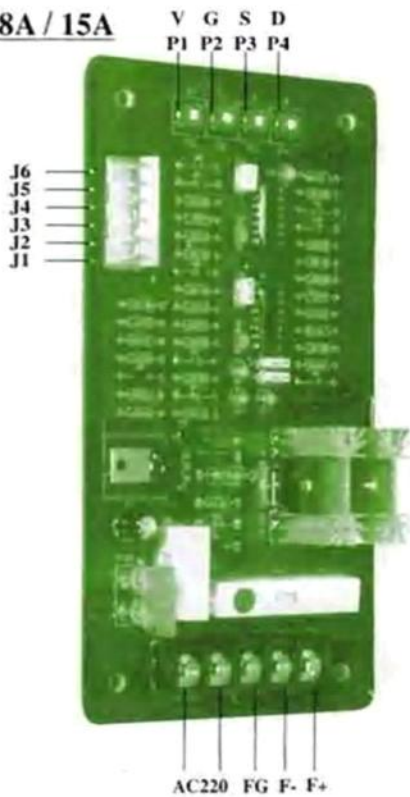

- V P1 – Voltage Adjustment
- G P2 – Gain Adjustment
- S P3 – Stability Adjustment
- D P4 – Effective Adjustment -
If used for paralleling

- J1 J2 – Short Circuit Voltage -
Internal Adjustment
- J1 J2 – Open Circuit Voltage -
For External Voltage Trimmer
- J3 J4 – Short Circuit - 50Hz
- J3 J4 – Open Circuit - 60Hz
- J5 J6 – Short Circuit -
For Parallel Units
- J5 J6 – Open Circuit -
For Single Unit Operation

SPECIFICATIONS

Input Voltage	: 175-275 ACV	Transient Voltage Adjustment Time	: 1 Second
Magnetic Resistance	: 5 Ohms – 10 Ohms	External Voltage Adjustment Range	: $\pm 5\%$ (1Kohms)
Output Voltage	: 0-95 DCV	Low Frequency Protection	: 60HZ – 40-60 Adjust Available
Output Current	: 0-8 DCA		50HZ – 30-50 Adjust Available
Steady State Voltage Adjustment	: $\pm 1\%$		
Transient Voltage Adjustment	: $\pm 20\%$		

DWP Durapower Asia Pte. Ltd.

Mailing Address/Warehouse

Tel : (65) 6560 5113
 Fax : (65) 6561 4002
 HP : (65) 9667 0533
 Website : www.durapowerasia.com
 Email : richateng@durapowerasia.com

Dealer Wanted:
Durapower Asia Pte. Ltd.

322 Jalan Ahmad Ibrahim
 Singapore 629151
 Mailing Address: Bukit Timah Post Office
 P.O. Box 043
 Singapore 915802

Tel: (65) 6560 5113 Fax: 6561 4002

H/P: (65) 9667 0533 Email: richateng@pacific.net.sg